



Control Mode: Programmable (Selectable White)

Wiring Diagram


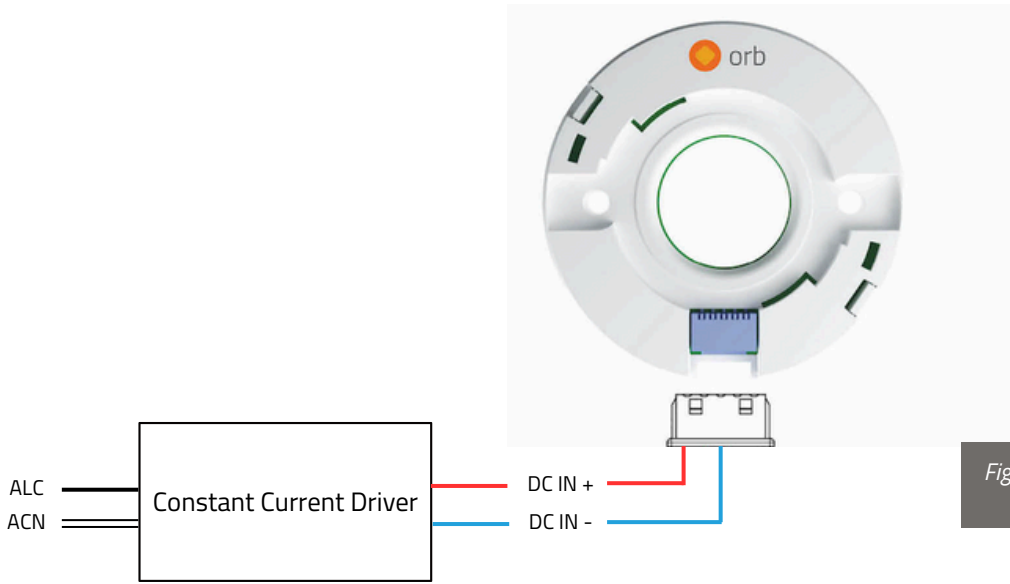


Figure 1 – Programmable Selectable White Wiring Diagram

Constant current driver intensity control could be 0-10V or phase dimming. Driver compatibility testing is required.

ARK-C1-5A-30

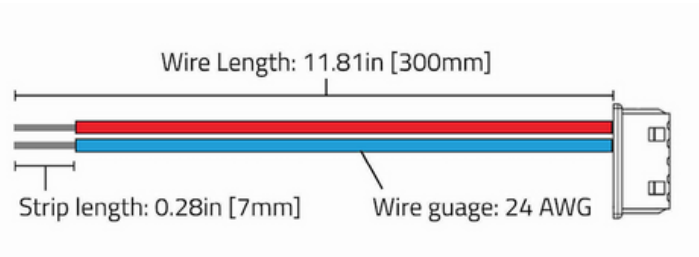

Please contact Arkalumen if you would like a different length of cable

Function	Wire Color
DC IN +	Red
DC IN -	Blue

Figure 2 – Programmable Selectable White Cable Assembly